


Product Information

The MGS-104B is a digital gas sensor designed for easy integration into air purifiers or demand controlled ventilation systems. NIDS's technology using Micom offers a complete, easy to use sensor system on a digital I2C interface, providing a humidity compensated VOC based indoor air quality signal.

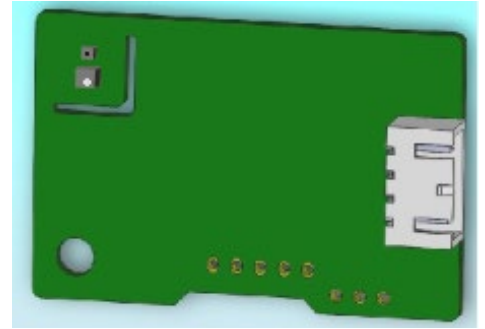

Electrical Characteristic

characteristic	Rating
Output Signal	0 ~ 500 IAQ index
Detectable range	0 ~ 1000ppm Ethanol in clean air
Supply voltage	DC 5V ± 5%, Ripple < 100mV at 60Hz
Current Consumption	< 7mA
Out put	I ² C
Operating Temp. Range	-10~50°C
Operating Humidity. Range	90%rh or less (without dew condensation)
Storage temperature	5~30°C
Power up time	< 300 sec
Dimensions	45 x 30 x 9.7 (mm)
weight	5.2 g

Application Ideas

- ✓ Indoor Air Quality
- ✓ Home Automation and control IoT Solution

Absolute Maximum Ratings

characteristic	Rating
Supply voltage	4.9V to 5.1V
Operating temperature	-10 to 60
Storage temperature	-30 to 70

Connector Pin Configuration

NUMBER	SYMBOL	DESCRIPTION
1	SDA/Tx	Serial Port Receiving Pin/I ² C Data
2	SCL/Rx	Serial Port Receiving Pin/I ² C Clock
3	GND	Ground
4	VCC	Positive Voltage 5V

Connector

Part Model : SMAW250-04P, Vender : YEONHO

Product Inquiry

- Address: 717, Seongnam Central Biz Tower, 314, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13201, Gyeonggi-do
- Tel: 031-742-8200
- E-MAIL : sales@nids.co.kr